
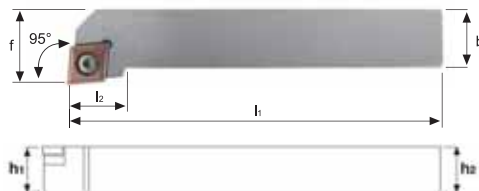


**Portainseri per tornitura esterna 95°**

Portainseri per tornitura esterna stelo in acciaio, sede per inserto positivo a norma ISO con fissaggio a vite, da utilizzare nelle lavorazioni di tornitura e sfacciatura.



Codice	€	ISO	Dimensioni					
			h1 (mm)	h2 (mm)	b (mm)	l1 (mm)	l2 (mm)	f (mm)
A620050108	---	◆ SCLCR 0808 D06	8	8	8	60	9	10
A620050110	---	◆ SCLCR 1010 E06	10	10	10	70	9	12
A620050112	---	◆ SCLCR 1212 F09	12	12	12	80	17	16
A620050116	---	◆ SCLCR 1616 H09	16	16	16	100	17	20
A620050120	---	◆ SCLCR 2020 K09	20	20	20	125	18	25
A620050125	---	◆ SCLCR 2525 M09	25	25	25	150	19	32
A620050216	---	◆ SCLCR 1616 H12	16	16	16	100	20	20
A620050220	---	◆ SCLCR 2020 K12	20	20	20	125	20	25
A620050225	---	◆ SCLCR 2525 M12	25	25	25	150	20	32
A620050308	---	◆ SCLCL 0808 D06	8	8	8	60	9	10
A620050310	---	◆ SCLCL 1010 E06	10	10	10	70	9	12
A620050312	---	◆ SCLCL 1212 F09	12	12	12	80	17	16
A620050316	---	◆ SCLCL 1616 H09	16	16	16	100	17	20
A620050320	---	◆ SCLCL 2020 K09	20	20	20	125	18	25
A620050325	---	◆ SCLCL 2525 M09	25	25	25	150	19	32
A620050416	---	◆ SCLCL 1616 H12	16	16	16	100	20	20
A620050420	---	◆ SCLCL 2020 K12	20	20	20	125	20	25
A620050425	---	◆ SCLCL 2525 M12	25	25	25	150	20	32

Ricambi				
				
Inserto	Sottopiacchetta	Vite sottopiacchetta	Vite inserto	Giravite
CCMT-CCGT 0602	-	-	A910250015	A559250070
CCMT-CCGT 09T3	A910450005	A910100005	A910250005	A559250090
CCMT-CCGT 1204	A910450010	A910100010	A910250010	
CCMT-CCGT 0602	-	-	A910250015	A559250070
CCMT-CCGT 09T3	A910450005	A910100005	A910250005	A559250090
CCMT-CCGT 1204	A910450010	A910100010	A910250010	

Ricambi: vedi pag. 492/493/494.


Codice	€	 Pz.	Foto	Denominazione	Figura	Dimensioni (mm)					Classi metallo duro										
						l	d	s	d1	r	Non rivestiti		Rivestiti							Cermet	
											NK 15	NP 25	RP 200	RP 300	RK 300	RK 400	KTP 230	TIN	TIALN		CX 55
A930250555	 ◆	10		CCMT 060202		6,4	6,35	2,38	2,8	0,2							●				
A930251055	 ◆	10		CCMT 060204		6,4	6,35	2,38	2,8	0,4								●			
A930251555	 ◆	10		CCMT 09T304		9,7	9,52	3,97	4,4	0,4								●			
A930252055	 ◆	10		CCMT 09T308		9,7	9,52	3,97	4,4	0,8								●			
A930252555	 ◆	10		CCMT 120404		12,9	12,7	4,76	5,5	0,4								●			
A930253055	 ◆	10		CCMT 120408		12,9	12,7	4,76	5,5	0,8							●				
A930201505	 ◆	10		CCGT 060202 ALU		6,4	6,35	2,38	2,8	0,2	●										
A930202005	 ◆	10		CCGT 060204 ALU		6,4	6,35	2,38	2,8	0,4	●										
A930202205	 ◆	10		CCGT 09T302 ALU		9,7	9,52	3,97	4,4	0,2	●										
A930202505	 ◆	10		CCGT 09T304 ALU		9,7	9,52	3,97	4,4	0,4	●										
A930203005	 ◆	10		CCGT 09T308 ALU		9,7	9,52	3,97	4,4	0,8	●										
A930203205	 ◆	10		CCGT 120402 ALU		12,9	12,7	4,76	5,5	0,2	●										
A930203505	 ◆	10		CCGT 120404 ALU		12,9	12,7	4,76	5,5	0,4	●										
A930204005	 ◆	10		CCGT 120408 ALU		12,9	12,7	4,76	5,5	0,8	●										

Tabella materiali e parametri di utilizzo consigliati vedi pag. 388/389/390/391.