


**Portainseri per tornitura esterna 72,5°**

Portainseri per tornitura esterna stelo in acciaio, sede per inserto positivo a norma ISO con fissaggio a vite, da utilizzare nelle lavorazioni di tornitura e copiatura.

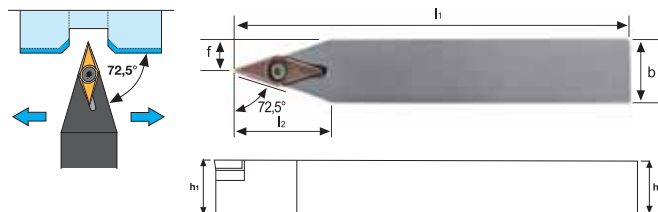

| Codice     | €   | ISO            | Dimensioni |            |            |            |           |
|------------|-----|----------------|------------|------------|------------|------------|-----------|
|            |     |                | h1<br>(mm) | h2<br>(mm) | l1<br>(mm) | l2<br>(mm) | f<br>(mm) |
| A620330112 | — ◆ | SVVBN 1212 F11 | 12         | 12         | 80         | 18,5       | 6         |
| A620330116 | — ◆ | SVVBN 1616 H11 | 16         | 16         | 100        | 24,7       | 8         |
| A620330120 | — ◆ | SVVBN 2020 K11 | 20         | 20         | 125        | 32         | 10        |
| A620330125 | — ◆ | SVVBN 2525 M11 | 25         | 25         | 150        | 38,9       | 12,5      |
| A620330220 | — ◆ | SVVBN 2020 K16 | 20         | 20         | 125        | 30,7       | 10        |
| A620330225 | — ◆ | SVVBN 2525 M16 | 25         | 25         | 150        | 38,8       | 12,5      |

| Ricambi   |                 |                      |              |            |
|-----------|-----------------|----------------------|--------------|------------|
|           |                 |                      |              |            |
| Inserto   | Sottopiacchetta | Vite sottopiacchetta | Vite inserto | Giravite   |
| VBMT 1103 | -               | -                    | A910250015   | A559250070 |
| VBMT 1604 | A910500010      | A910100005           | A910250005   | A559250090 |

Ricambi: vedi pag. 492/493/494.

| Codice     |                                                                                     | €  |   | Foto        | Denominazione                                                                      | Figura | Dimensioni (mm) |      |     |     |   | Classi metallo duro |           |        |        |        |        |         |     |        |       |
|------------|-------------------------------------------------------------------------------------|----|------------------------------------------------------------------------------------|-------------|------------------------------------------------------------------------------------|--------|-----------------|------|-----|-----|---|---------------------|-----------|--------|--------|--------|--------|---------|-----|--------|-------|
|            |                                                                                     |    |                                                                                    |             |                                                                                    |        | l               | d    | s   | d1  | r | Non rivestiti       | Rivestiti |        |        |        |        |         |     | Cermet |       |
|            |                                                                                     |    |                                                                                    |             |                                                                                    |        |                 |      |     |     |   | NK 15               | NP 25     | RP 200 | RP 300 | RK 300 | RK 400 | KTP 230 | TIN | TIALN  | CX 55 |
| A931020555 |    | 10 |  | VBMT 110304 |  | 11,1   | 6,35            | 3,18 | 2,9 | 0,4 |   |                     |           |        |        |        | ●      |         |     |        |       |
| A931021055 |   | 10 |                                                                                    | VBMT 160404 |                                                                                    | 16,6   | 9,52            | 4,76 | 4,4 | 0,4 |   |                     |           |        |        |        |        | ●       |     |        |       |
| A931021555 |  | 10 |                                                                                    | VBMT 160408 |                                                                                    | 16,6   | 9,52            | 4,76 | 4,4 | 0,8 |   |                     |           |        |        |        |        | ●       |     |        |       |

Tabella materiali e parametri di utilizzo consigliati vedi pag. 388/389/390/391.