




## Inserti in metallo duro per filettatura interna Whitworth

Inserto a profilo completo per filettatura interna destra Whitworth 55°,  
per operazioni di filettatura su tutti i materiali.



**NR-W**

| Codice     | €   | Pz. | ISO                  | N° filetti<br>per pollice |           | P       | M     | K       | N       | S     | H     |
|------------|-----|-----|----------------------|---------------------------|-----------|---------|-------|---------|---------|-------|-------|
| A573300080 | --- | 10  | TN11 NR 140 W U 9035 | 14                        | Vc m/min. | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 |
| A573300090 | --- | 10  | TN11 NR 190 W U 9035 | 19                        | Vc m/min. | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 |
| A573300280 | --- | 10  | TN16 NR 100 W U 9035 | 10                        | Vc m/min. | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 |
| A573300290 | --- | 10  | TN16 NR 110 W U 9035 | 11                        | Vc m/min. | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 |
| A573300310 | --- | 10  | TN16 NR 140 W U 9035 | 14                        | Vc m/min. | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 |
| A573300320 | --- | 10  | TN16 NR 160 W U 9035 | 16                        | Vc m/min. | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 |
| A573300330 | --- | 10  | TN16 NR 190 W U 9035 | 19                        | Vc m/min. | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 |

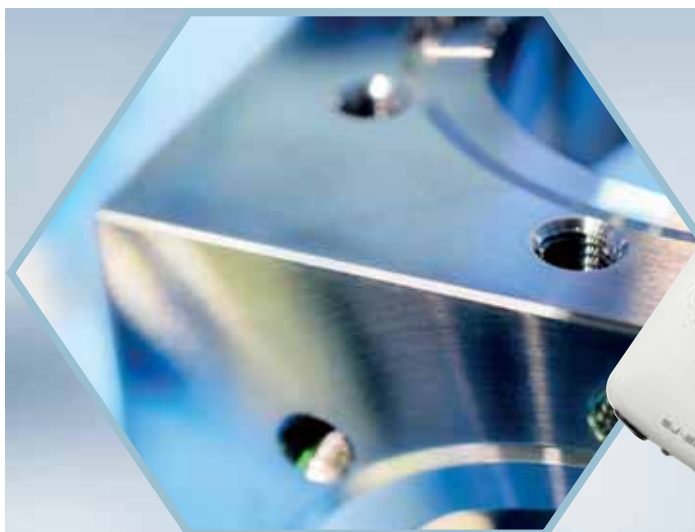



**Mitutoyo**

Rugosimetro portatile  
Codice F03943



**STRUMENTI DI MISURA ► CAPITOLO 3**

Scopri **TUTTA LA GAMMA** a partire da pag. 746